


GEMÜ 675

manually operated, DN 15 to 300

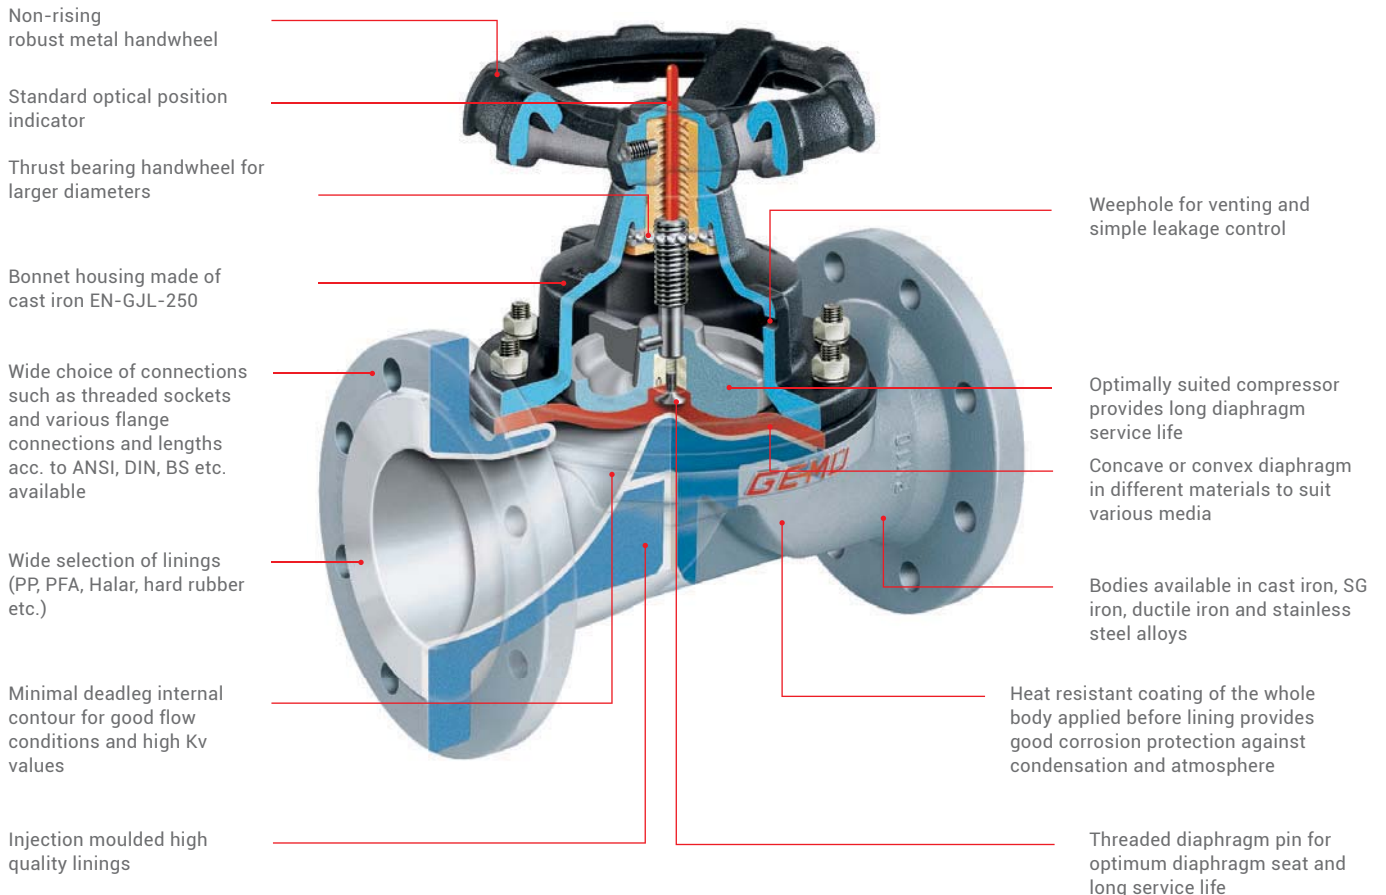

Features

- Suitable for inert, corrosive, liquid and gaseous media
- Insensitive to particulate media
- Valve bodies and diaphragms available in various materials and designs
- Various connections available
- Compact design for tight spaces

